



HNI 482 - 9/18/2020

For Bulletin Archive Navigate to:

www.auveco.com/hot-new-items

1-800-354-9816

Fax: 1-800-552-8197

Connect
with us



NEW ITEMS

Bulletin

Items Available for Immediate Shipment

Photos Actual Size



22945

(GM: 11611882)
Black

M4.2-1.41 x 16mm
Tail Lamp & Interior Trim Torx Button
Head Tapping Screw
Head Diameter: 11mm
T15 Torx Drive
Point Type: BR
Buick Cascada, Envision,
Chevrolet Bolt EV, Camaro, Corvette,
Equinox, Malibu, Silverado, Spark,
GMC Sierra & Terrain 2016 - On
Buick Enclave, Cadillac CT6, Escalade,
Chevrolet Colorado, Cruze &
GMC Canyon 2018 - 2016

UNIT PACKAGE: 50



22946

(GM: 11547420)
Black Zinc



M4.2-1.41 x 20mm
Bumper, Grille, Fog Lamp
Hex Head Sems
Tapping Screw
Hex: 7mm
Washer O.D.: 17mm
Point Type: BR
Grade: 2
Buick Enclave, Cadillac XT6,
Chevrolet Blazer, Equinox, Express,
Silverado, Traverse, GMC Savana,
Sierra & Terrain 2018 - On
Malibu 2018 - 2016

UNIT PACKAGE: 25



22926

(Honda: 90601-S30-003)
White Nylon



Cowl & Wheelhouse Screw
Grommet with Sealer
Head Size: 13mm x 13mm
Stem Length: 13mm
Overall Height: 14mm
Fits into 8mm x 8mm Hole
Use with Auveco 22514
Acura MDX, RDX, RL, RLX, TL,
TLX, TSX & ZDX 2019 - 2001
Honda Accord, Civic, Clarity, CR-V, Fit,
HR-V, Insight, Odyssey, Passport, Pilot,
Prelude, Ridgeline & S2000 1997 - On

UNIT PACKAGE: 25



22944

(Lexus & Toyota: 53879-02150; 53879-33030)
Black Nylon

Bumper to Fender Liner Clip
Overall Length: 43mm
Overall Width: 39mm
Lexus ES300 & ES350 2019 - On
Toyota Camry & Corolla 2018 - On

UNIT PACKAGE: 5

Heatless Moisture Resistant Butt Connectors

- Anaerobic sealant creates a barrier against moisture & air and creates an environmentally sealed connection
 - Easy to use, simply strip the wire & crimp the connector to activate the sealant
 - Nylon insulation is abrasion & puncture resistant
 - No heat tools needed for installation



25019



25020



25021

Auveco Part No.	Wire Range	Color	Unit Pkg.
25019	22-18 Ga.	Red	10
25020	16-14 Ga.	Blue	10
25021	12-10 Ga.	Yellow	10



HNI 482 - 9/18/2020

For Bulletin Archive Navigate to:

www.auveco.com/hot-new-items

1-800-354-9816

Fax: 1-800-552-8197

Connect
with us



NEW ITEMS

Bulletin

Items Available for Immediate Shipment

Wrap & Seal Self-Fusing Silicone Tape

- Ideal for applications requiring a water-proof seal and/or high temperatures
- Applications include battery terminals & cable, automotive hose systems, marine connections wire taps & connections and more
- Self-fusing & begins curing immediately (full cure within 24 hours)
- No adhesive residue upon removal
- Alternative to heat shrink tubing
- Excellent insulator with high dielectric strength: 400 volts per mil
- Operating Temperature: -85°F to 500°F
- Tensile strength: 700 psi
- Salt water resistant



Auveco Part No.	Size (Width x Length)	Color	Unit Pkg.
25022	1" x 20'	Black	1
25023	1" x 20'	Red	1



Thin Wall Heat Shrink Tubing Disk Packs

- 8ft lengths
- 2:1 shrink ratio
- Polyolefin heat shrink, ideal for light duty applications
- Effective for wire bundling, abrasion resistance and strain relief
 - Highly flame retardant
- Convenient dispenser pack allows for easy storage and cutting – eliminating waste
- Available in 3 colors to NEMA color-code standard to identify connections easily and correctly

Auveco Part No.	Wire Range	Color	Size	Pre-Shrunk I.D.	Post-Shrunk I.D.	Max. Wall Thickness	Unit Pkg.
25016	22-18 Ga.	Red	3/16"	.187"	.093"	.020"	1
25017	16-14 Ga.	Blue	1/4"	.250"	.125"	.025"	1
25018	12-10 Ga.	Yellow	5/16"	.312"	.156"	.025"	1



HNI 482 - 9/18/2020

For Bulletin Archive Navigate to:

www.auveco.com/hot-new-items

1-800-354-9816

Fax: 1-800-552-8197

Connect
with us



NEW ITEMS

Bulletin

Items Available for Immediate Shipment

Clear Adhesive Lined Dual Wall Heat Shrink Tubing

- 3:1 shrink ratio
- Flexible adhesive lined tubing provides a water-tight seal and strain relief
 - Abrasion resistance for connectors & splices
- Clear polyolefin tubing allows for visual inspection of the connection
 - Dielectric strength: 600 volts per mil
- Temperature range: -67°F to 230°F (-55°C to 110°C)



25024



25025




25026



25027



25028

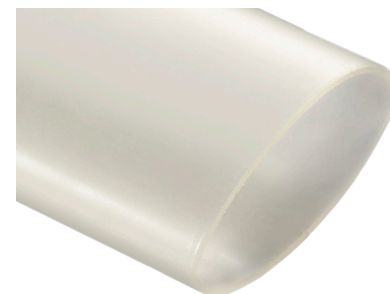

25029

Auveco Part No.	Wire Range	Size	Pre-Shrunk I.D.	Post-Shrunk I.D.	Max. Wall Thickness	Length	Unit Pkg.
25024	20-14 Ga.	3/16"	.187"	.060"	.040"	6"	25
25025	18-10 Ga.	1/4"	.250"	.080"	.040"	6"	25
25026	12-6 Ga.	3/8"	.375"	.125"	.060"	6"	25
25027	8-4 Ga.	1/2"	.500"	.160"	.070"	6"	25
25028	4-2/0 Ga.	3/4"	.750"	.250"	.070"	6"	25
25029	2-4/0 Ga.	1"	1.00"	.320"	.100"	6"	25