

Items Available for Immediate Shipment

Photos Actual Size

Self-Drilling Tapping Screw and GM U-Nut Hyundai Moulding Clip and Mercedes Retainer, Clip and Grommet



25086

Zinc Plated

#8 x 1/2"

Phillips Truss Head Self Drilling
Tapping Screw

UNIT PACKAGE: 100




25045

(GM: 11569971)
Silver Magni 565

Fender Panel U-Nut
Screw Size: M8-1.25
Panel Range: 3mm
Center of Hole to Edge: 27.3mm

Cadillac Escalade & GMC Yukon 2014 - 2007; Chevrolet
Avalanche 2013 - 2007; Silverado, Suburban, Tahoe &
GMC Sierra 2018 - 2007

UNIT PACKAGE: 5

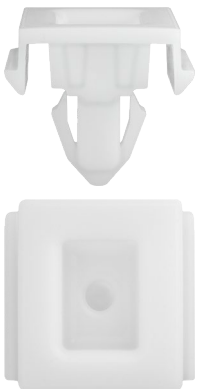

22938

(Hyundai: 87767-B1000)
White Nylon

Rocker Moulding Clip
Width: 25mm
Length: 25mm
Stem Length: 12.5mm
Fits into 12mm Hole
Hyundai Genesis & Genesis G80
2018 - 2014

UNIT PACKAGE: 50



25038

(Mercedes: 002-988-05-42)
Black Nylon

Fender Apron Retainer
Head Diameter: 18mm
Stem Length: 15mm
Stem Size: 5.5mm x 12mm

Mercedes-Benz C250 & GLK250 2015 - 2012; C300 2014 -
2008; C350, C63 AMG 2015 - 2008; CLA250, CLA45 AMG
2014 - On; E250

2016 - 2014; E350 2014 - 2010; E400 2017 - 2015; E550
2017 - 2010; GLK300d 2016; ML250 2015; SL400 2016 -
2015; SL450 2019 - 2017; SL550, SL63 AMG & SL65 AMG
2019 - 2013

UNIT PACKAGE: 25



25039

(Mercedes 000-991-44-71)
White Nylon

Rocker Moulding Clip with Sealer
Width: 16mm
Length: 21mm
Overall Height: 17mm
Stem Length: 9mm
Fits into 9mm Hole

Mercedes-Benz C250 2014 - 2012; C300,
C350 & C63 AMG 2014 - 2008

UNIT PACKAGE: 25



25040

(Mercedes: 002-998-17-01)
White Nylon

Emblem Grommet
Head Diameter: 7mm
Stem Length: 4mm
Fits into 5.5mm Hole

Mercedes-Benz C300 & C63 AMG 2015 - On; C350e
2018 - 2016; C400 2015; C43 AMG 2017 - On; C450 AMG
2016; E350 2014; E400, S550, S63 AMG, S65 AMG 2017 -
2015; E550 2017 - 2014; GLC300, GLC350e, GLC43 AMG,
GLC63 AMG 2019 - 2017; GLK250 & GLK350 2015

UNIT PACKAGE: 50

Items Available for Immediate Shipment

Clear Adhesive Lined Dual Wall Heat Shrink Tubing

- 3:1 shrink ratio
- Flexible adhesive lined tubing provides a water-tight seal and strain relief
 - Abrasion resistance for connectors & splices
- Clear polyolefin tubing allows for visual inspection of the connection
 - Dielectric strength: 600 volts per mil
 - Temperature range: -67°F to 230°F (-55°C to 110°C)



25024 & 25102



25025 & 25103




25026 & 25104



25027 & 25105



25028 & 25106

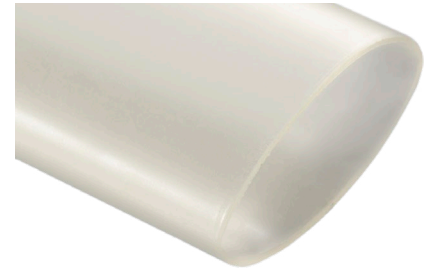

25029 & 25107

Auveco Part No.	Wire Range	Size	Pre-Shrunk I.D.	Post-Shrunk I.D.	Max. Wall Thickness	Length	Unit Pkg.
25024	20-14 Ga.	3/16"	.187"	.060"	.040"	6"	25
25102							10
25025	18-10 Ga.	1/4"	.250"	.080"	.040"	6"	25
25103							10
25026	12-6 Ga.	3/8"	.375"	.125"	.060"	6"	25
25104							10
25027	8-4 Ga.	1/2"	.500"	.160"	.070"	6"	25
25105							10
25028	4-2/0 Ga.	3/4"	.750"	.250"	.070"	6"	25
25106							5
25029	2-4/0 Ga.	1"	1.00"	.320"	.100"	6"	25
25107							5