

# NEW ELECTRICAL ADDITIONS

*\*Photos not actual size\**

#519 – 8/17/2023

Page 1 of 2

## High Amperage Heavy Duty – Waterproof Circuit Breakers with Manual Reset

- Heavy duty and high amperage to defend accessory and auxiliary high amp draw applications in RVs, marine craft, emergency vehicles and heavy-duty trucks.
- Waterproof and ignition rated for use in marine engine compartments, meeting thorough UL 1500 and SAE J1171 standards.
- Commonly installed alongside a vehicle's battery as the primary source of power protection.
  - Surface mount with 1/4-28 Studs
  - Voltage Rating: 42VDC
- Operation Temperature: -25°F ~ 180°F (-32°C ~ 82°C)
- Interrupting Rating: 3000A @ 30VDC




Auveco Part No.	Current (Amps)	Unit Pkg.
<b>25530</b>	50A	1
<b>25531</b>	80A	1
<b>25532</b>	100A	1
<b>25533</b>	120A	1
<b>25534</b>	150A	1

## Mega® Bolt-On Fuse Blocks

- Designed for Mega® / Mega®-B bolt-on fuses
- Block accepts 5/16" (M8) ring terminals
- Interlocking pins on the sides allow for connecting of additional Mega® fuse blocks to create a multi-fuse block
- The insulating cover protects against accidental short circuits and prevents anything from accidentally touching the exposed terminal studs, with cover breakouts that allow wire access in three directions



25540

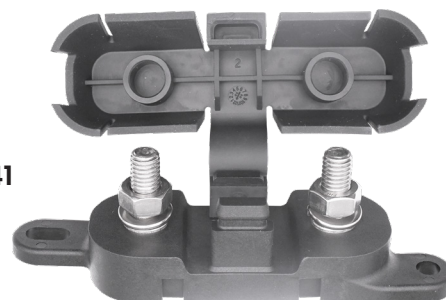

25541

Auveco Part No.	Voltage Rating	Max. Current Rating	Cover Type	Unit Pkg.
<b>25540</b>	32VDC	500A	Hard Cover	1
<b>25541</b>	32VDC	500A	Soft Cover	1

# NEW ELECTRICAL ADDITIONS

*\*Photos not actual size\**

#519 - 8/17/2023


Page 2 of 2

## Add-A-Fuses

- When you're short on space in a fuse block, but still have additional accessories to protect, these lightweight Add-A-Fuses turn one fuse slot in a fuse block into 2 slots to protect additional accessories.
- More circuits are gained, and both the new and existing circuits are fully protected by separate fuses.
- No cutting or splicing necessary - include built-in butt splice connectors for easy wiring.



**25535**

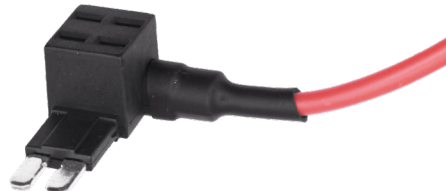

**25536**



**25537**



**25538**



**25539**

Auveco No.	Fuse Type	Voltage Rating	Max. Combined Current Rating	Max. Primary Circuit	Max. Auxiliary Circuit	Unit Pkg.
<b>25535</b>	Mini	32VDC	30A	25A	15A	1
<b>25536</b>	ATO/ATC	32VDC	30A	25A	15A	1
<b>25537</b>	Micro2®	58VDC	30A	25A	15A	1
<b>25538</b>	Mini Low Profile	58VDC	30A	25A	15A	1
<b>25539</b>	Micro3®	58VDC	30A	20A	15A	1