


# Sec. 9

# TEENUT® FASTENERS

**Round Base -3 Rivet or Nail Holes for Assembly**  
 Material: Low Carbon Steel, Zinc Finish

For applications into materials of high density and where repeated bolt removal and replacement is expected.

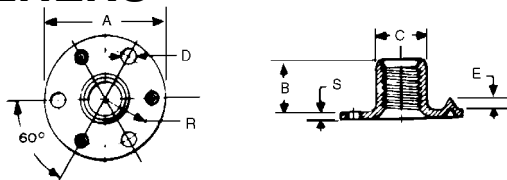

Auveco No.	Thread Size	A	B	C	D +.005	E	R	S	Unit Pkg.
<b>18341</b>	1/4-20	3/4	5/16	.311/.306	.098	5/64	19/64	.050	50
<b>2262</b>	3/8-16	1	1/2	.471/.466	.145	5/64	5/64	.075	100


## Claw Prongs -Round Base

Material: Low Carbon Steel, Plain Finish

This Long Prong Teenut has six claw-like prongs that penetrate into wood, toe in, and grip so tightly that you have to drive it to back it out of its hole.



Auveco No.	Thread Size	A	B	C	D	S	Unit Pkg.
<b>10729</b>	10-24	3/4	9/32	.232/.227	13/64	.035	50
<b>11324</b>	1/4-20	3/4	5/16	.294/.289	15/64	.042	50
<b>10730</b>	1/4-20	3/4	7/16	.294/.289	15/64	.042	50
<b>10731</b>	5/16-18	7/8	3/8	.369/.364	19/64	.052	50
<b>10732</b>	3/8-16	1.0	7/16	.448/.443	11/32	.062	25




## Claw Prongs -Slimline, Round Base

Material: Low Carbon Steel, Plain Finish

Recommended where superior retention in soft wood is required.



Auveco No.	Thread Size	A	B	C	D	S	Unit Pkg.
<b>11325</b>	1/4-20	3/4	5/16	.294/.289	15/64	.042	100
<b>11326</b>	5/16-18	7/8	3/8	.369/.364	19/64	.052	50
<b>11327</b>	3/8-16	1.00	7/16	.448/.443	11/32	.062	25

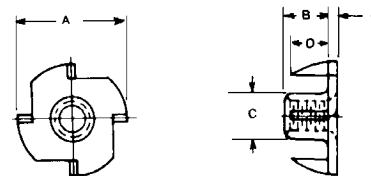


## Claw Prongs -Slimline, Round Base

Material: 300 Series Stainless Steel, Plain Finish



Auveco No.	Thread Size	A	B	C	D	S	Unit Pkg.
<b>17013</b>	1/4-20	3/4"	5/16"	19/64"	3/16"	.047"	25

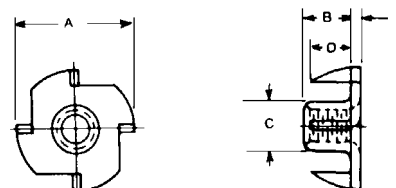

## Straight Prongs -Round Base

Material: Low Carbon Steel, Plain Finish

This Teenut is recommended for thick material applications and applications requiring the top of the barrel to provide a bearing surface for mating parts.



Auveco No.	Thread Size	A	B	C	D	Type	S	Unit Pkg.
<b>11328</b>	6-32	9/16	15/64	.164/.157	1/8	3 Prongs	.020	50
<b>11331</b>	10-32	3/4	9/32	.232/.227	13/64	3 Prongs	.035	50
<b>11332</b>	1/4-20	3/4	5/16	.311/.306	15/64	4 Prongs	.050	50

